

# Equation 764 Poly Carpet Tile



## Fiber System

Solution Dyed Twisted Polypropylene

## Pile Weight

18 oz/SY 610 g/m<sup>2</sup>

## Gauge

1/12th 2.1 mm

## Density

5500

## Format

Tile Size: 19.7" x 39.4" (50 cm x 100 cm)  
Carton: 10 tiles per carton = 6 SY = 5 m<sup>2</sup>  
Pallet: 30 cartons

## Sustainability

- CRI Green Label Plus
- 100% PVC-Free
- Up to 20% pre-consumer recycled content

## European Spec Backing

PVC-Free, Four-Layers:

1. Non-Woven Primary Layer  
- Strong Edges
2. Advanced Polymer Pre-Coat  
- Superior Tuft Lock
3. Modified Bitumen Core  
- Stability in Heavy Traffic
4. Polyester Felt Back  
- Reliable Adhesion

## Testing


Flammability Class I (ASTM E648)  
Static <2 kV (AATCC 134)

## Warranties

Lifetime Comprehensive Stain (No Exclusions)  
Lifetime Backing Performance  
Lifetime Commercial Wear

See full warranty text at [matrexxfloor.com](http://matrexxfloor.com)

## Installation Methods

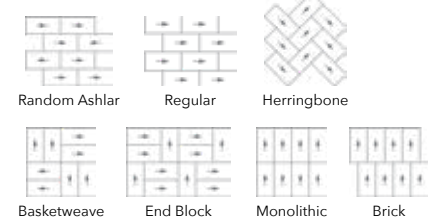

## Recommended Adhesive

**Next 1200™ 4GAL**  
4 gallon pail (34lbs)  
48 pails per pallet

## Sample SKUS

**Handle Boards**  
HB764MX  
5 boards per carton (25 lbs)

## Folders

3P764MX  
20 folders per carton (60 lbs)

